

PVC Coated Strut Straps and J Hangers

Perma-Cote PVC coated strut straps & J hangers are used with coated strut to support conduit installations in a variety of configurations. Strut straps may be used in either vertical or horizontal positions to support conduit. Both are provided with stainless steel hardware. Conduit spacing may be as close together as allowed by the couplings. J hangers may be used with hanger rods or other means of support to securely fasten conduit runs.

Features:

- 20 mil gray PVC exterior coating
- Available in 11 trade sizes



J Hanger

Strut Straps

PVC COATED J HANGERS

| SIZE | FERROUS CATALOG # | WEIGHT FOR 100 PCS | STD PACK |
|--------|-------------------|--------------------|----------|
| 1/2" | B3690-1/2 | 18 | 25 |
| 3/4" | B3690-3/4 | 21 | 25 |
| 1" | B3690-1 | 22 | 25 |
| 1-1/4" | B3690-1-1/4 | 25 | 25 |
| 1-1/2" | B3690-1-1/2 | 27 | 25 |
| 2" | B3690-2 | 29 | 25 |
| 2-1/2" | B3690-2-1/2 | 64 | 25 |
| 3" | B3690-3 | 72 | 25 |
| 3-1/2" | B3690-3-1/2 | 84 | 25 |
| 4" | B3690-4 | 138 | 10 |
| 5" | B3690-5 | 162 | 10 |

PVC COATED STRUT STRAPS


| SIZE | FERROUS CATALOG # | GAUGE METAL | WEIGHT FOR 100 PCS | STD PACK |
|--------|-------------------|-------------|--------------------|----------|
| 1/2" | B2008 | 14 | 13.0 | 100 |
| 3/4" | B2009 | 14 | 15.0 | 100 |
| 1" | B2010 | 14 | 17.0 | 100 |
| 1-1/4" | B2011 | 12 | 19.5 | 100 |
| 1-1/2" | B2012 | 12 | 28.0 | 100 |
| 2" | B2013 | 12 | 31.0 | 50 |
| 2-1/2" | B2014 | 12 | 36.0 | 50 |
| 3" | B2015 | 12 | 42.0 | 50 |
| 3-1/2" | B2016 | 11 | 56.0 | 25 |
| 4" | B2017 | 11 | 64.0 | 25 |
| 5" | B2019 | 10 | 76.0 | 25 |

PVC Coated Ferrous Struts

Perma-Cote PVC coated strut is a versatile system of structural elements that can be used to build supports for a variety of applications. When combined with coated conduit hangers and other accessories, coated strut is a versatile and economical way to provide reliable support for conduit runs and other electrical and mechanical installations.

Features:

- 20 mil gray PVC exterior coating
- 2 trade sizes and 3 standard styles

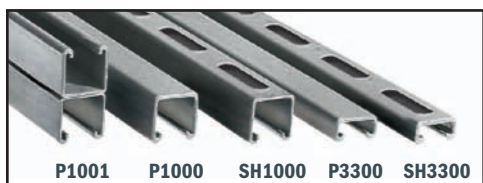


P1001

P1000

SH1000

P3300

SH3300



PVC COATED STRUT

| FERROUS CATALOG # | DESCRIPTION | NOMINAL WT. PER 100 FT. | X | Y | STRUT THICKNESS |
|-------------------|-------------------------|-------------------------|------|------|-----------------|
| P1000-10 | Channel | 200 | 1.67 | 1.67 | 12 ga. |
| SH1000-10 | Channel Slotted | 185 | 1.67 | 1.67 | 12 ga. |
| P1001-10 | Channel Back to Back | 380 | 1.67 | 3.29 | 12 ga. |
| P3300-10 | Channel Shallow | 135 | 1.67 | 0.92 | 12 ga. |
| SH3300-10 | Channel Shallow Slotted | 130 | 1.67 | 0.92 | 12 ga. |

PVC COATED STRUT CUT-TO-LENGTH

| FERROUS CATALOG # | DESCRIPTION | X | Y | LENGTH IN FT. | STRUT THICKNESS |
|-------------------|---------------|------|------|---------------|-----------------|
| P1000-1 | 1-5/8 CHANNEL | 1.67 | 1.67 | 1 | 12 ga. |
| P1000-1-1/2 | 1-5/8 CHANNEL | 1.67 | 1.67 | 1-1/2 | 12 ga. |
| P1000-2 | 1-5/8 CHANNEL | 1.67 | 1.67 | 2 | 12 ga. |
| P1000-2-1/2 | 1-5/8 CHANNEL | 1.67 | 1.67 | 2-1/2 | 12 ga. |
| P1000-3 | 1-5/8 CHANNEL | 1.67 | 1.67 | 3 | 12 ga. |

CHANNELS WITH SLOTTED HOLES

| | | | | | |
|--------------|---------------|------|------|-------|--------|
| SH1000-1 | 1-5/8 CHANNEL | 1.67 | 1.67 | 1 | 12 ga. |
| SH1000-1-1/2 | 1-5/8 CHANNEL | 1.67 | 1.67 | 1-1/2 | 12 ga. |
| SH1000-2 | 1-5/8 CHANNEL | 1.67 | 1.67 | 2 | 12 ga. |
| SH1000-2-1/2 | 1-5/8 CHANNEL | 1.67 | 1.67 | 2-1/2 | 12 ga. |
| SH1000-3 | 1-5/8 CHANNEL | 1.67 | 1.67 | 3 | 12 ga. |

PVC Coated Strut Nuts

Perma-Cote PVC coated strut nuts are used to assemble strut components and to secure coated all thread rod in a section of strut. These are available with or without a spring to aid in placement and assembly.

Features:


- 20 mil gray PVC exterior coating
- 10 trade sizes from 1/2" through 4"



N225-WO



N225



N2500

COATED STRUT NUT

| PIPE SIZE | FERROUS CATALOG # |
|-----------|-------------------|
| 3/8" | N228-WO |
| 1/2" | N225-WO |
| 3/8" | N228 |
| 1/2" | N225 |
| 3/8" | N2500-375 |
| 1/2" | N2500-050 |